

Tax Invoice

Shipping Address :

support user  
67, ave Marc de la Haye Le vaudreuil Eure  
Le vaudreuil, Eure, 27100  
FR

Invoice No : FR20220826155177  
Invoice Date : 2022-08-26

Marketplace Operator:  
Alibaba.com Singapore E-Commerce Private Limited


Sold By: Breakthrough Tech Store

| ITEMS                                                                                                                                     | Qty                            | Unit Price<br>(tax excl.) | Discount | Tax Rate | Tax Amount | Amount (Transaction<br>Currency: CNY) | Amount (In EUR) |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------------------|----------|----------|------------|---------------------------------------|-----------------|
|                                                                                                                                           | Order Number: 8154442206378725 |                           |          |          |            |                                       |                 |
| Universal Manti 3/3 Plus Reusable<br>Parachute for DJI Mavic 3/2/Air 2/Air<br>2S Slow Down Drone fall Speed Improve<br>Safety Accessories | 1                              | 753.44                    | 0.00     | 20%      | 150.69     | 904.13                                | 135.34          |
| Shipping Fee                                                                                                                              | -                              | 16.84                     | 0.00     | 20%      | 3.37       | 20.21                                 | 3.03            |
| Grant Total                                                                                                                               |                                |                           |          |          |            | 924.34                                | 138.37          |
| Amount paid                                                                                                                               |                                |                           |          |          |            | 924.34                                | 138.37          |

|                          |            |
|--------------------------|------------|
| Exchange Rate            | 0.14970000 |
| Intrinsic value (in EUR) | 112.79     |

|       |                       |                    |
|-------|-----------------------|--------------------|
| VAT%  | Taxable base (in EUR) | Total VAT (in EUR) |
| 20%   | 115.31                | 23.06              |
| Total | 115.31                | 23.06              |

Note:  
1.Alibaba.com Singapore E-Commerce Private Limited is raising this invoice in accordance to the applicable tax laws in Netherlands.  
The relevant price includes the French eco-contribution where applicable.

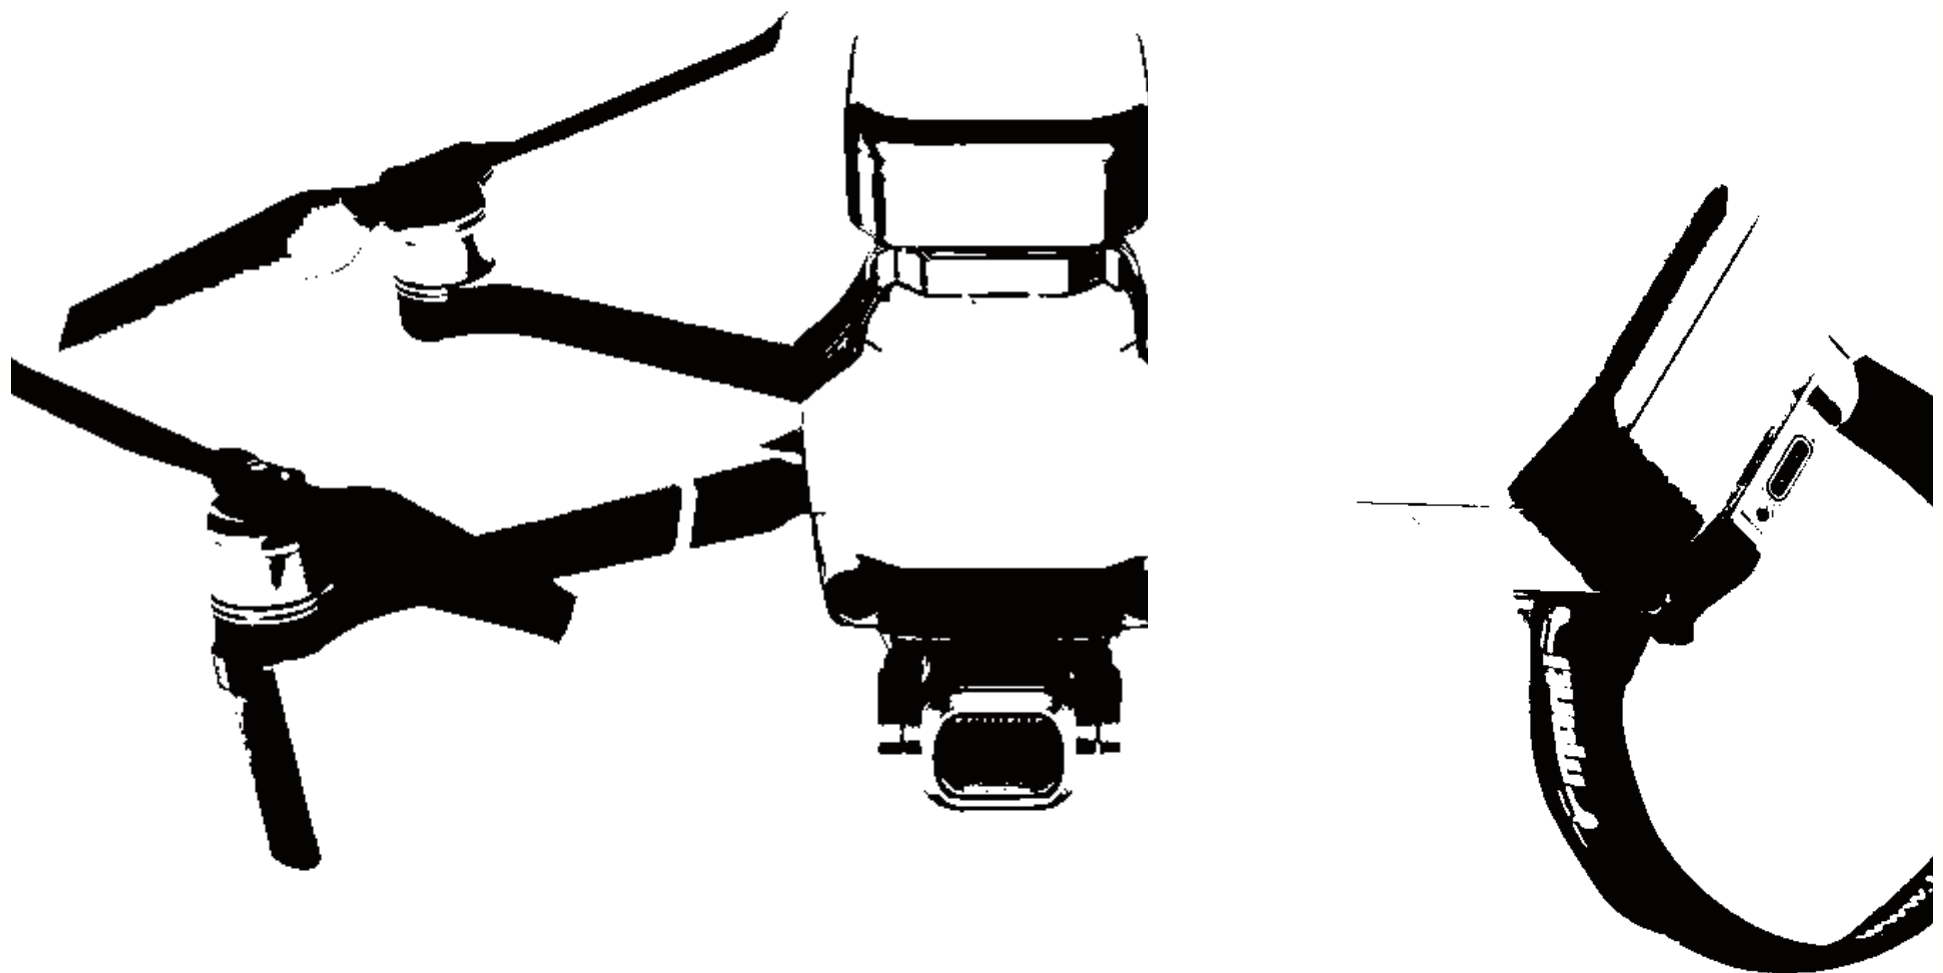

## Manti 3 Plus Drone Parachute DJI Mavic

Parachute area is 1.1 times that of the Manti 3 Replaceable parachute cabin design Long...

★★★★★ 2 reviews


IN STOCK ☒

**\$179.99** ~~\$299.00~~

TYPE: STANDARD EDITION (SINGLE PARACHUTE CABIN)

Suit Edition (Dual Parachute Cabin)

QUANTITY:



Secure  
Payment



12-Month  
Warranty



Professional  
Customer Service



DJI Cooperation  
Authorization

🕒 Orders ship within 48 hours

🚚 Free shipping to Worldwide

DESCRIPTION

VIDEO DISPLAY

CUSTOMER REVIEWS

- Parachute area is 1.1 times that of the Manti 3
- Replaceable parachute cabin design
- Long endurance with 150mAh battery
- Light weight, does not affect the battery life of the drone
- 32-bit ARM processor, instant deploy parachute in 0.5 seconds
- Suitable model: Dji Mavic Air 2/2s, Mavic 2/3, Mavic Pro



Description



Frmware download



Tutorial

## Manti 3/Manti 3 Plus

Parachute for DJI mavic series



Flyfire-APS  
algorithm



Integrated  
black-box



Quick  
reaction time



Upgrade  
firmware easily



Reuseable  
design




General  
purpose




A black and white photograph of a man in a wireframe suit standing next to a large, dark, abstract sculpture. The man is on the left, wearing a suit made of a grid of dots or small circles, which makes his body appear transparent. He is standing with his arms slightly out. To his right is a large, dark, abstract sculpture that looks like a tangled mass of fabric or a complex, organic form. The background is a plain, light-colored wall.



The area of the parachute cloth is 1.1 times that of Manti 3, so it can adapt to the heavier DJI Phantom Series UAV. The test average deceleration is 5.5m/s (Phantom 4). It does not affect the upper RTK module and the lower PTZ.

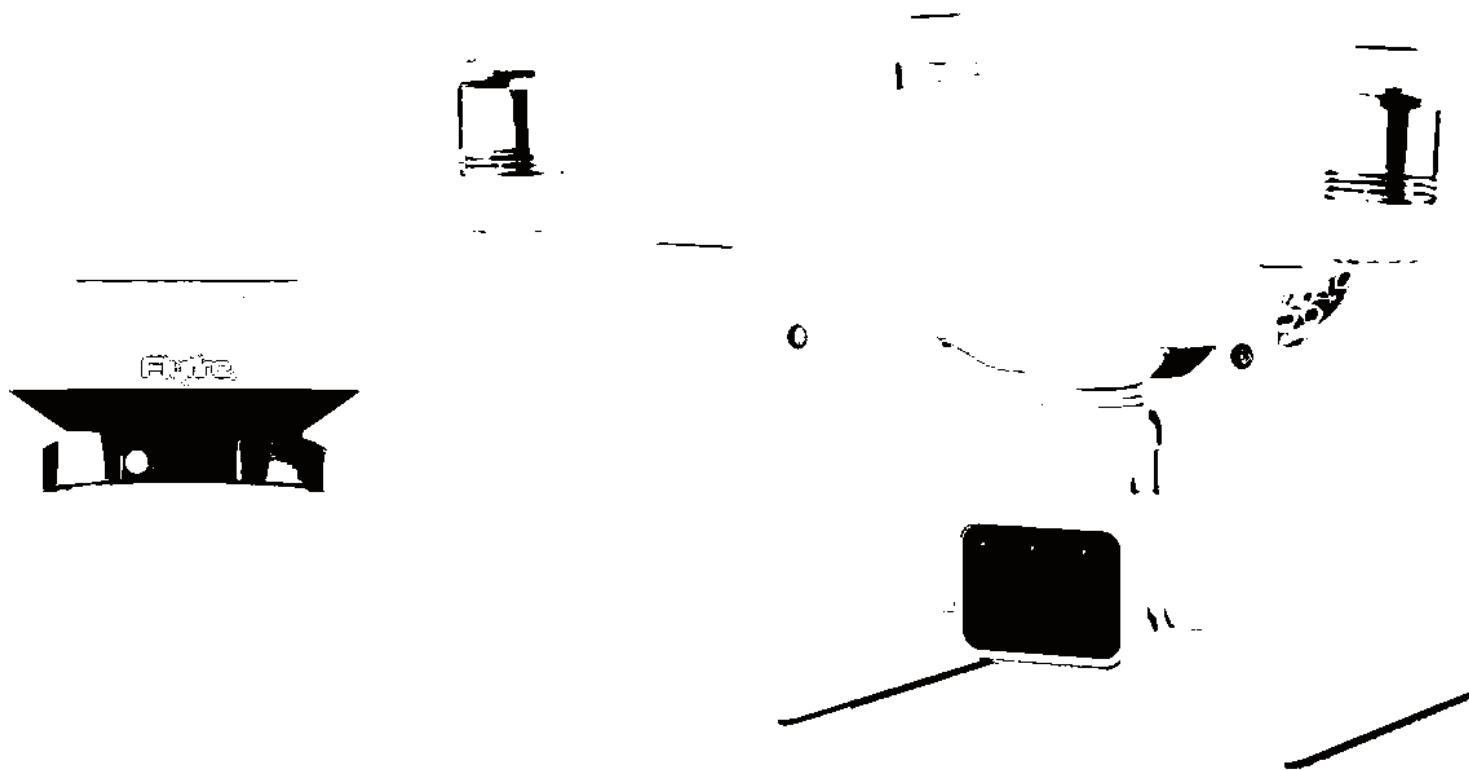

## Manti 3/Manti 3 Plus



It is more convenient to reuse and has a variety of safety performance options

The new generation Manti adopts a replaceable parachute cabin design. The parachute cabin includes power units and tools.




Honey Bee

\$0

can be quickly replaced. At the same time, it can be divided into standard version and plus version,


both of which are common, so as to adapt to more models

\*When changing from Manti 3 parachute to 3 plus parachute to adapt to Phantom series UAVs, be sure to change the Manti software version to phantom version.

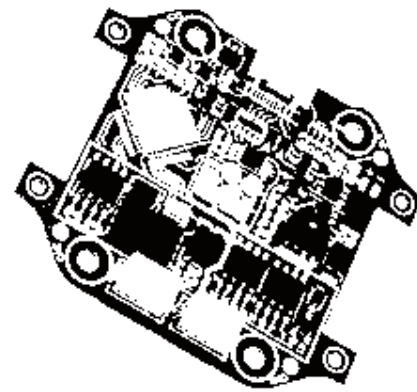

## 32-bit ARM processor

Omnidirectional attitude and barometer data are collected and processed in real time to distinguish the flight state of the UAV in milliseconds. IMU and barometer summarize the scores. Once you perceive that the UAV is in a dangerous situation, you can respond instantly in 0.5 seconds, and then issue the parachute opening command, so that you can fry without panic and land calmly.

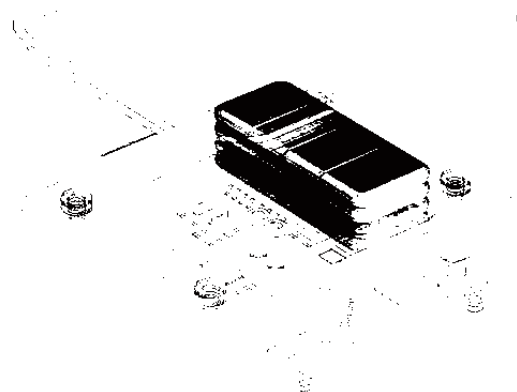

## Long Endurance

The 150 mA battery gives you a pleasant endurance experience. You can charge the UAV for 30 minutes at a time × 6 times flight endurance. The battery power can be viewed immediately, and the power alarm function.

**ENJOY A SAFE AND CAREFREE FLIGHT**



**NOTICE UTILISATEUR : MODULE DE COUPE-CIRCUIT DJI MAVIC AIR 2 / AIR 2 S**

**1- Installation du module de coupe-circuit sur le drone**

- 1- Insérez le module de coupure à l'emplacement de la batterie dans le drone avec la pince fournie, assurez-vous qu'il soit bien clipsé.
- 2- Insérez la batterie dans le module de coupure.



Retirez la batterie puis utilisez la pince fournie pour déclipser le kit de coupure.

- 1- Une fois le système complètement installé, allumer le drone en effectuant un appui court puis un appui long (comme pour tous les produits DJI).
- 2- Allumer la télécommande (coupe-circuit, long appui sur l'interrupteur) (comme la télécommande de déclenchement page suivante), le drone est alors sous tension.

Pour recharger la batterie de la télécommande du coupe-circuit, branchez un câble micro USB sur la prise  reliée à un ordinateur, une prise allume-cigare ou un chargeur USB. Le voyant de charge  passe alors au rouge. La batterie est rechargée lorsque ce même voyant s'éteint.



Boutons de déclenchement du coupe-circuit  
Voyant lumineux de statut de la télécommande  
Buzzer  
Voyant de charge de la batterie  
Interrupteur  
Port de charge micro-USB

Télécommande pour radiocommande DJI RC-N1

# BOT

SPÉCIALISTE DRONES PRO

## SYMBOLE DE LED

### Vert fixe :

Le système est opérationnel (appairage ok) et prêt au déclenchement.

### Orange fixe :

Module déclenché ou non appairé.



### Rouge clignotant et alarme sonore discontinue :

Niveau de batterie de la télécommande de déclenchement faible.



### Rouge fixe et alarme sonore continue :

Niveau de batterie de la télécommande de déclenchement critique.

Si la télécommande du module de coupure s'éteint pendant le vol, le drone continuera de voler mais il vous sera impossible de couper le circuit en urgence via le système.

## Procédure

Procédure à effectuer uniquement en cas de maintenance. La télécommande que vous avez reçue est déjà appairée avec le boîtier coupure moteur.

- 1- Allumer la partie radio.
- 2- Appuyer longtemps sur les boutons  simultanément pendant 5 secondes, le voyant passe au violet fixe.
- 3- Allumer la coupure moteur sur le drone.
- 4- La télécommande émet un puis deux et enfin trois bips et s'allume en vert.

Si la télécommande s'allume en rouge, l'appairage n'est pas validé, recommencez la procédure, si l'erreur persiste contactez ABOT.